


**Stappenplan
om uw wifi-verbinding
met de Goodwe-omvormer
te herstellen**

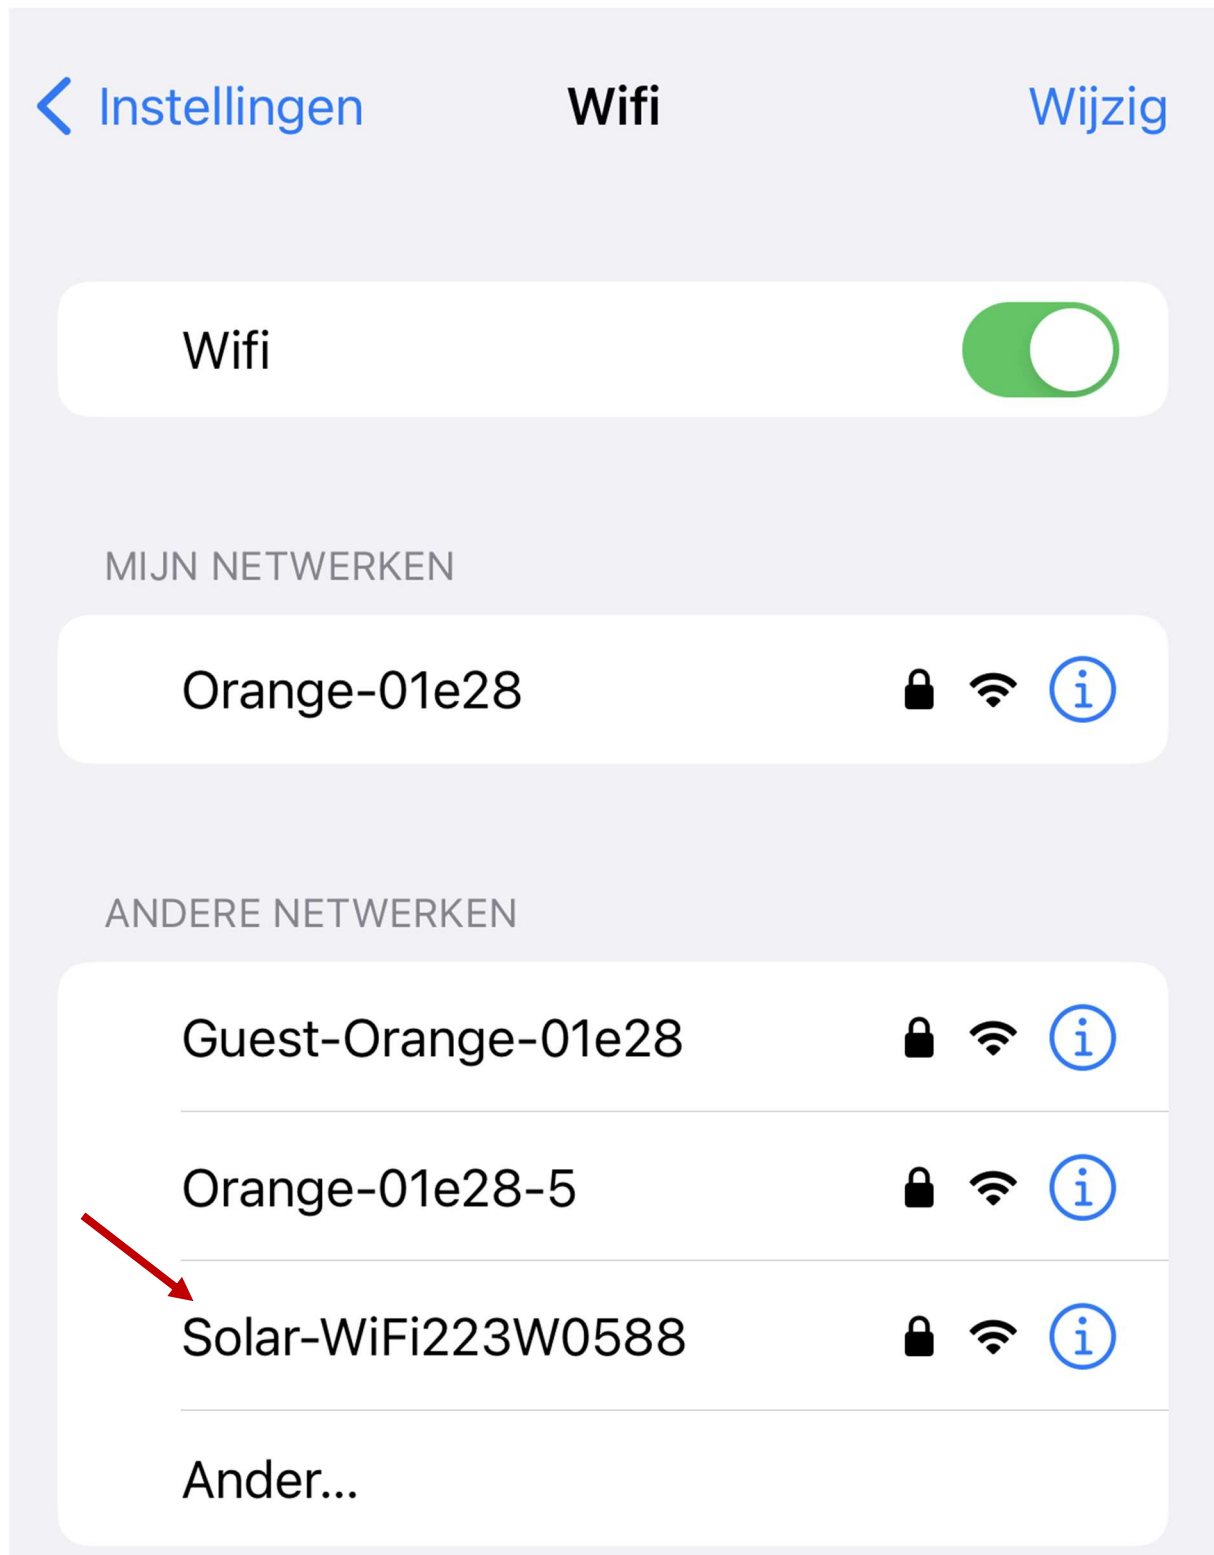

INSTELLINGEN >> WIFI >>
selecteer Solar-WiFi223W0588
(cijfers kunnen verschillend zijn)

19:23

4G 77

Voer het wachtwoord voor 'Solar-WiFi223W0588' in

Annuleer

Wachtwoord

Verbind

Wachtwoord

12345678

Je kunt ook toegang tot dit wifinetwerk krijgen door je iPhone naast een iPhone, iPad of Mac te houden die verbonden is met dit netwerk en die jouw gegevens in Contacten heeft staan.

Tik uw wachtwoord in 12345678

Via

19:23



 10.10.100.253  Annuleren

 Setting 
10.10.100.253

OPEN UW INTERNETBROWSER
TIK OP UW ADREBALK 10.10.100.253 in
en druk op enter

19:23



Inloggen op website



Inloggen

Voor <http://10.10.100.253> zijn een gebruikersnaam en een wachtwoord vereist. Je verbinding met deze site is niet beveiligd

[Inloggen](#)

[Annuleren](#)

VOER LOGIN EN PASWOORD IN

Login: admin paswoord: admin

19:23



▲ 10.10.100.253



中文 | English

设置向导
高级设置
设备管理

设备信息

固件版本号	V1.1.2.1
MAC地址	28:9C:6E:62:B0:94
无线AP模式	开启
SSID	Solar-WIFI223W0588
IP地址	10.10.100.253
无线STA模式	开启
路由器SSID	Orange-01e28
加密方式	WPA2PSK
加密算法	AES

未连接网络！可能原因如下：

1.网络是否存在 2.密码是否正确 3.信号是否很弱

★帮助： 设置向导将帮助您在一分钟之内完成对设备的设置。

[开始向导](#)

Web Ver:V1.3.1

WIJZIG DE TAAL NAAR **ENGELS**

19:23



▲ 10.10.100.253



中文 | English

Wizard
Advanced
Management

Device information

Firmware version	V1.1.2.1
MAC address	28:9C:6E:62:B0:94
Wireless AP mode	Enable
SSID	Solar-WiFi223W0588
IP address	10.10.100.253
Wireless STA mode	Enable
Router SSID	Orange-01e28
Encryption method	WPA2PSK
Encryption algorithm	AES

Cannot join the network, maybe caused by:

router doesn't exist, or signal is too weak, or password is incorrect.

★Help: Wizard will help you to complete setting within one minute.

[Start Setup](#)

Web Ver:V1.3.1

Klik op Start Setup

19:24



▲ 10.10.100.253



中文 | English

Wizard
Advanced
Management

Device information

Firmware version	V1.1.2.1
MAC address	28:9C:6E:62:B0:94
Wireless AP mode	Enable
SSID	Solar-WiFi223W0588
Wireless	00.253
Wireless	Enable
Wireless	-01e28
Wireless	A2PSK
Wireless	AES

It is strongly recommended that you change the password of your "Solar-WiFi*" before or after the installation. The manufacturer will NOT be responsible for any of the privacy information leakage caused by using the default password of "Solar-WiFi*".
Click "Advanced" on the left column to change the password.

I know Continue

★Help: Wizard will help you to complete setting within one minute.

Start Setup

Web Ver:V1.3.1

Tik op **Continue**

19:24



▲ 10.10.100.253



中文 | English

Wizard
Advanced
Management

Please select your current wireless network:

	SSID	AUTH/ENCRY	RSSI	Channel
<input type="radio"/>	Orange-01e28	8:B0:55:20:1E:2C	100	1
<input type="radio"/>	Guest-Orange-01e28	A:B0:55:20:1E:2D	100	1
<input type="radio"/>	Orange-01e28	30:B1:B5:48:C8:84	59	6
<input type="radio"/>	Orange-01e28	30:B1:B5:49:B:7C	47	11
<input type="radio"/>	TelenetWIFre	92:5C:34:D8:80:A5	28	1
<input type="radio"/>	telenet-74B42F	90:5C:44:D8:80:A5	28	1

Refresh

★Note: When RSSI of the selected WiFi network is lower than 30%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

If your wireless router does not broadcast SSID, please click 'Next' and add a wireless network manually.

Back

Next

Web Ver:V1.3.1

Na het laden van de beschikbare netwerken:
vink uw Wifi-netwerk aan en tik op **next**

19:24



▲ 10.10.100.253



中文 | English

Add wireless network manually:

Network name (SSID)

Encryption method

Encryption algorithm

Please enter the wireless network password:

Password

Show psk

★**Note:** case sensitive for SSID and Password.
Please make sure all parameters of wireless network are matched with router, including password.

Tik uw wifi paswoord in en klik op next

U krijgt een melding van goede verwerking

**Na ongeveer 1 minuut verdwijnt het knipperende
oranje lichtje en schijnt het lampje constant.**